

**TO:** T10 Membership  
**FROM:** Paul A. Suhler, Quantum Corporation  
**DATE:** 2 November 2007  
**SUBJECT:** T10/07-469r0, ADT-2: ADT Over Ethernet (ADToE)

## Revisions

- 0 Initial revision (2 November 2007)

## General

At the September 2007 working group meeting it was decided to defer this feature to ADT-3. We need to discuss whether it would be worth delaying ADT-2 letter ballot up to six months to incorporate a thoroughly-considered version of this proposal.

To allow future data transfer devices to have improved and alternate means to communicate with automation devices, Ethernet is proposed as an ADT port. One possible configuration would be an isolated subnet with the library controller and all drives attached. These ports will typically be 10/100BaseT, so there will be a great increase in bandwidth above the fastest existing RS422-based ADI ports.

Implementing an ADI Ethernet port could be done in two ways. One would be to use iSCSI to carry SCSI commands, data, and status and then to invent a new protocol for VHF data. A simpler approach would be to transport the entire ADT protocol over a networking protocol. This proposal is to do the latter, and is named ADT over Ethernet (ADToE).

While the acronym ADToE is catchy, it's not technically accurate, since this protocol applies to TCP over any lower layer. Does anyone object? ADToTCP sounds like a chant.

A straightforward implementation of ADToE would be to open a TCP connection between the automation device and the data transfer device. A TCP connection (also known as a stream) provides bi-directional reliable delivery of a stream of bytes. The existing ADT link layer protocol provides the necessary framing and error detection and recovery.

## Technical issues

The following are technical issues which must be considered in developing this proposal:

- Should TCP user timeout and recovery occur before ADT ACK timeout? Probably not, because a TCP user timeout results in closing the connection, so it should occur much less frequently than ACK timeout. This proposal recommends a user timeout of five minutes, as recommended in RFC 793. It is unclear whether this number is realistic in today's environments.
- Because the Baud Rate field in the Login IU cannot represent a value of more than 6 553 500 baud, it cannot describe the speed of a 10 Mbit per second or faster Ethernet connection. The approach in this proposal is to state that this field is not applicable to ADToE connections and to use a fixed value, FFFFh, in the Login IU. This leaves open the question of whether the Max Ack Offset will be adjusted correctly in the pending proposal from HP.
- Existing ADT inherently has a single I\_T nexus. For ADToE, an I\_T nexus will correspond to a TCP connection, of which there could be more than one. Each end of a TCP connection is a socket, which is specified by a unique combination of an IP address and a port number. In the case of ADToE, only sockets using the unique ADToE port number (TBD) will be used. One socket can connect to multiple other sockets. See the proposed changes below for more detail.
- References to physical layer signals outside the physical layer clause have been qualified.

- The I\_T nexus loss case list has a new one, for closing of the TCP connection while still logged in at the ADT level.

The following technical issues have not been addressed in this proposal:

- While the maximum payload size decided on in ADT negotiation will continue to be driven by device resources, can it be kept independent of the TCP Maximum Segment Size (MSS), which is typically 1500 bytes in IPv4? An ADT frame split across multiple TCP segments might be handled inefficiently. (The MSS is the largest amount of data that can be sent in an unfragmented piece. The Maximum Transmission Unit (MTU) is the largest packet (header, data, and trailer) that can be sent. Because data is a component of a packet, MTU > MSS.)
- The TCP user API includes an abort call to clear the connection in both directions. This could be integrated into ADT link level error recovery, e.g., after recovery has failed and the port reverts to default parameters.
- If a DTD is installed with both Ethernet and RS-422 ADI ports connected to the automation device, there could be confusion, although this would not be a new issue as currently nothing prohibits having two ADI ports. There is a practical issue, i.e., implementations may have taken shortcuts that would make the behavior of the ADC device server non-SAM-compliant with respect to multiple I\_T nexuses. This is not a standards issue, and this proposal will not address the question of multiple ADI ports. I would like feedback on whether anyone expects to have ADT running over both RS-422 and TCP simultaneously.
- The actual physical layer mandates 10 and 100 Mbit per second Ethernet over unshielded twisted pair and will leave 1000 Mbit optional. Only one connector is standard – or even widely-used – for UTP Ethernet, the RJ-45; no mention is made of the connector.

### **Documentation issues**

The following are issues about how to integrate this new material into ADT-2's structure:

- This proposal does not add a major subclause to the model section. Would it work better if there were one?
- The term "link layer" as used in ADT clashes with the Ethernet meaning of that term, since the ADT link layer will run on top of TCP. If TCP were added to ADT-2 as an alternate physical layer then the terminology would become even more confusing. The approach in this proposal is to add it as a top-level clause after the physical layer, and to add text where required to indicate that either the existing ADT physical layer in clause 5 or the TCP layer in the new clause 6 will apply to any given ADT port. An alternative would be to abstract the interface to the layer below the ADT link layer, which would make the ADT physical layer and the TCP-based ADT-over-Ethernet layer peers in the protocol hierarchy.
- RFC 793 provides an API for function calls from the user layer into the TCP layer. However, it does not specify function calls from TCP up into the user layer. Therefore this proposal specifies a complete API. ADToE service requests are mapped to TCP calls, with the arguments to the ADToE service requests being a subset of those of the TCP calls. Calls up into the user layer are specified as ADToE service confirmations and ADToE service indications.
- Should references to clauses in this standard include the word "clause?" E.g., "See 6" versus "See clause 6."

### **Markup conventions**

Proposed additions are in **blue**, removed text is in **crossed-out red**.

Editor's notes in **green** provide information on decisions to be made and actions to be performed before this proposal can be integrated into the standard.

## Changes to ADT-2 rev. 5

### **Change to clause 2**

Add the following subclauses:

#### **2.1.4 IETF references**

RFC 791, *Internet Protocol – DARPA Internet Program – Protocol Specification*

RFC 793, *Transmission Control Protocol (TCP) – DARPA Internet Program – Protocol Specification*

RFC 2460, *Internet Protocol, Version 6 (IPv6) Specification*

#### **2.1.5 IEEE references**

IEEE 802.3i-1990, *Supplement to 802.3 – 10Base-T*

IEEE 802.3aa-1998, *100BaseT Maintenance Revision #5*

### **Changes to clause 3**

Add the following definition:

**3.1.x ADT physical layer:** The physical layer described in clause 5.

**3.1.y ADToE port:** An ADT port that uses the transport layer described in clause 6.

**3.1.z ADToE TCP layer:** The transport layer described in clause 6.

### **Changes to clause 4**

Modify the first lettered list as follows:

#### **4.2 Default operating parameters**

The default operating parameters for a port are as follows:

- a) the baud rate shall be set to 9 600 **when using an ADT physical layer, and 6 553 500 when using an ADToE TCP layer;**
- b) the ACK offset shall be set to 1; and
- c) the Maximum Payload size shall be 256 bytes.

#### **4.7 Hard reset**

A hard reset is a response to a power on condition or optionally, **for an ADT port that uses the ADT physical layer**, a Reset<sub>s</sub> event (see table 7). The target port's response to a hard reset shall include initiating the equivalent of a logical unit reset for all logical units as described in SAM-3.

The effect of the hard reset on tasks that have not completed, SCSI device reservations, and SCSI device operating modes is defined in SAM-3.

#### **4.8 I\_T nexus loss**

An I\_T nexus loss event shall occur if an ADT port:

- a) sends a Port Login IU with the AOE bit set to one;
- b) receives a Port Login IU with the AOE bit set to one;
- c) receives an ACK IU in response to a Device Reset IU;

- d) that uses the ADT physical layer detects the change of state of the Sense line from presence to absence (i.e., Sense<sub>a</sub> for DT device port and Sense<sub>b</sub> for automation device port (see figure 44 12); or  
 e) that uses the ADT physical layer detects the assertion of the Reset<sub>a</sub> line (see table 7 13); or  
 f) that uses the TCP layer receives a CLOSED service indication while the Port State Machine is in either P1:Login or P2:Logged In state (see 6.3.2).

#### 4.10.1 Acknowledgement time-out period calculation

When changing operating parameters (see 3.1.32), a port that uses the ADT physical layer shall calculate a new acknowledgement IU time-out period using the formula in figure 9. An ADT port that uses the TCP layer shall use an acknowledgement time-out period of 500 milliseconds, unless the time-out period is changed by means of acknowledgement time-out period negotiation (see 4.10.2). The port shall apply the new acknowledgement IU time-out period to every frame transmitted after changing operating parameters.

---

Editor's Note 1: Is 500 milliseconds the right value?

---

#### Change to clause 5

Add a new subclause 5.1:

### 5 Physical layer

#### 5.1 Physical layer applicability

This clause does not apply to ADToE ports.

Subsequent subclauses are re-numbered to 5.2, 5.3, and 5.4.

#### New clause 6 for TCP connections

Add the following clause after the existing clause 5, Physical layer:

### 6 ADToE TCP layer

#### 6.1 ADToE TCP layer introduction

This clause does not apply to ADT ports that use the ADT physical layer.


Encoded ADT frames are transmitted and received between two ADT ports via a Transmission Control Protocol (TCP) network connection (see RFC 793), rather than by the ADT physical layer. A TCP connection provides a bi-directional stream of bytes that are guaranteed to be delivered in the order in which they were sent. The TCP layer described in this clause defines how ADT ports use TCP connections to send ADT frames. The ADT link layer protocol (see clause 7) provides framing and error detection and correction on the byte streams sent and received via the TCP layer.

A TCP connection is uniquely identified by a pair of sockets (see RFC 793). A socket is defined as an internet address concatenated with a port identifier. The internet address is either an IPv4 (see RFC 791) or IPv6 (see RFC 2460) address. An ADT over Ethernet (ADToE) socket is a socket in which the port number is the ADToE port number, [TBD: obtain port number]. An ADToE connection is a TCP connection between two ADToE sockets. An ADToE port is an ADT port that uses an ADToE connection to communicate with another ADT port.

Within an automation or DT device, multiple ADToE ports may connect to remote ADToE ports via the same local ADToE socket. Within a device, an ADT port shall connect with exactly one ADToE connection, and one ADToE connection shall connect with exactly one ADT port (i.e., an ADToE port in one device is uniquely connected with one ADToE port in another device).

The means by which one port learns the internet address of a remote port in order to establish a connection is beyond the scope of this standard.

One physical Ethernet port may respond to multiple internet addresses, and thus may contain multiple ADToE sockets, one for each of the internet addresses. If a device (e.g., device A) contains only one ADToE socket (i.e., there is one Ethernet port and it responds to a single internet address) then that ADToE socket may be connected to ADToE sockets in different devices. Each of those ADToE connections connects to a different ADT port in device A. (See Figure 12.)

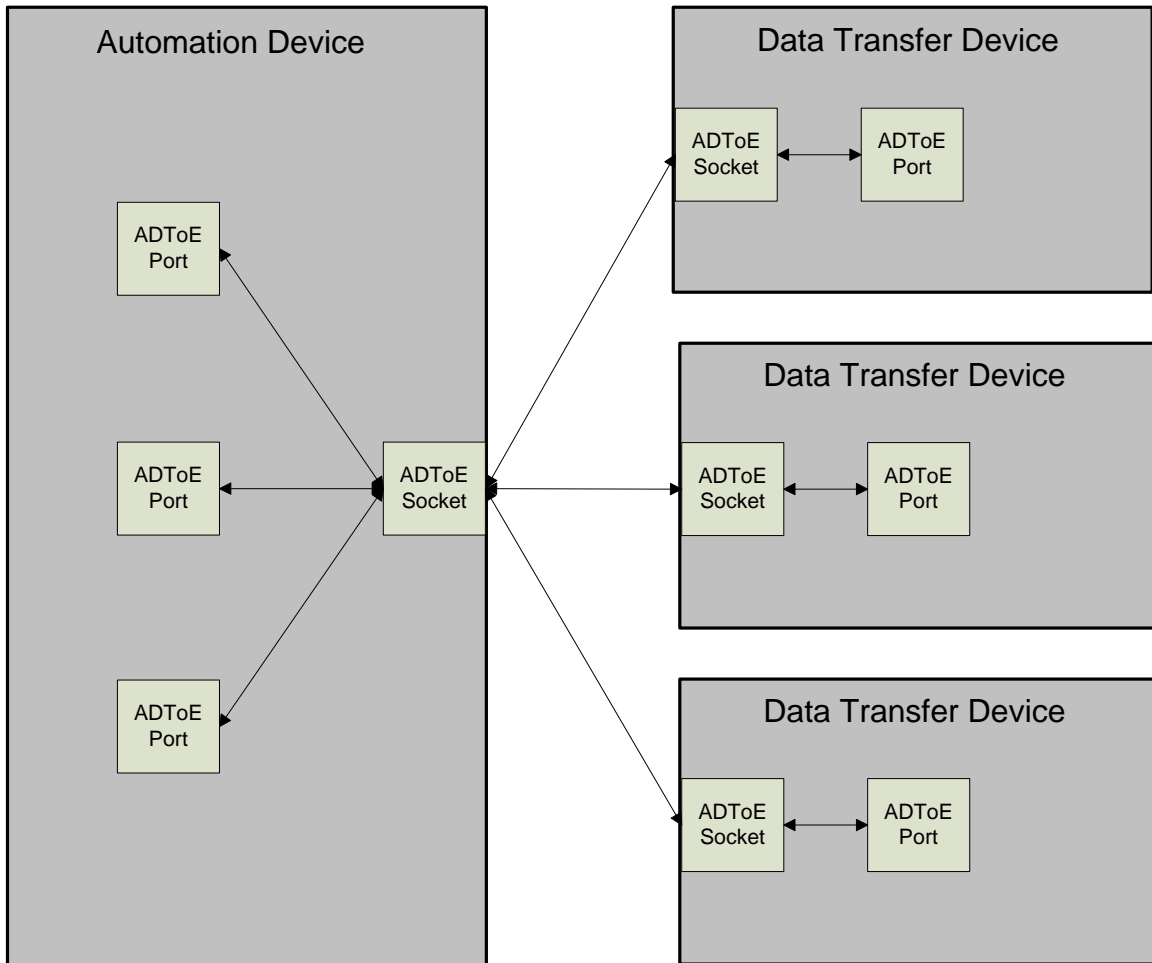

**Figure 12 – Example of shared ADToE socket in an automation device**

---

Editor's Note 2: Need to contact ICANN to obtain a registered port number for the ADToE port (<http://www.iana.org/cgi-bin/usr-port-number.pl>).

---

Editor's Note 3: Should some of this go in the model section?

---

## 6.2 TCP layer protocol services

### 6.2.1 TCP layer protocol services introduction

The TCP layer protocol services consist of a number of service requests, service confirmations, and service indications to establish and remove connections, to send and receive data, and to perform other functions on the connection. RFC 793 specifies a user API for invoking TCP functions; this API consists of a number of calls. RFC 793 describes information to be passed back to the user process, but does not

provide an API. This clause provides a set of service requests, service confirmations, and service indications for use by ADI ports. The mapping of service requests to TCP calls is also specified.

For the state diagram of a TCP connection, see RFC 793.

---

Editor's Note 4: Do we need a service indication to tell that an internet address has been assigned? Prior to that, a connection cannot be opened.

---

### 6.2.2 The OPEN service request

An ADToE port uses the OPEN service request to open a connection to a remote ADToE port. The OPEN service request performs a TCP open call as specified in RFC 793. The arguments to the TCP open call shall be as specified in Table 9.

**Service Response = OPEN (IN (Active, [Remote Internet Address], [Timeout]), OUT ([Local Connection Name]))**

Input arguments:

**Active:** A Boolean value indicating whether the port shall perform an active or passive OPEN. A value of TRUE indicates that an active OPEN shall be performed. A value of FALSE indicates that a passive OPEN shall be performed.

**Remote Internet Address:** The internet address of the remote port. If the value of Active is TRUE, the Remote Internet Address shall be included. If the value of Active is FALSE, the Remote Internet Address shall not be included.

**Timeout:** The time allowed for the TCP layer to deliver data. If this time is exceeded, then the connection is closed.

Output arguments:

**Local Connection Name:** The identifier for the connection. The Local Connection Name argument is reported if and only if the Service Response is OK

**Service Response** assumes one of the following values:

**OK:** The call completed successfully and returned OK.

**CONNECTION ILLEGAL:** The call failed and returned ERROR: CONNECTION ILLEGAL FOR THIS PROCESS.

**INSUFFICIENT RESOURCES:** The call failed and returned ERROR: INSUFFICIENT RESOURCES.

**FOREIGN SOCKET UNSPECIFIED:** The call failed and returned ERROR: FOREIGN SOCKET UNSPECIFIED.

**CONNECTION ALREADY EXISTS:** The call failed and returned ERROR: CONNECTION ALREADY EXISTS.

**Table 9 — TCP open call argument values**

TCP open call argument	Value
local port	ADToE port number
foreign socket	Remote Internet Address and ADToE port number
active/passive	If Active argument of RECEIVE service request is TRUE, then 1. If Active argument of RECEIVE service request is FALSE, then 0.
timeout	Should be the global timeout value, five minutes, specified in RFC 793. This timeout should be much longer than the ADT acknowledgement time-out period (see 4.10), to allow ADT link level error recovery (see 4.6) to proceed without closing the connection.
precedence	Not specified by this standard.
security/compartments	Not specified by this standard.

options	Not specified by this standard.
---------	---------------------------------

### 6.2.3 The SEND service request

An ADToE port uses the SEND service request to send data to the remote ADToE port. The SEND service request performs a TCP send call as specified in RFC 793. The arguments to the TCP send call shall be as specified in Table 10.

If a subsequent SEND service request is invoked before all of the data in the buffer specified by a previous SEND service request, then all of the data in the buffer for the previous invocation shall be sent before any data in the buffer of the subsequent invocation is sent.

**Service Response = SEND (IN (Local Connection Name, Buffer, Buffer Size))**

Input arguments:

- Local Connection Name:** The identifier for the connection.
- Buffer:** A buffer containing data to be transmitted. The data in the buffer shall be encoded (see 7.2).
- Buffer Size:** The number of bytes of encoded data to be transmitted on the connection.

**Service Response** assumes one of the following values:

- OK:** The call completed successfully and returned OK.
- CONNECTION ILLEGAL:** The call failed and returned ERROR: CONNECTION ILLEGAL FOR THIS PROCESS.
- CONNECTION DOES NOT EXIST:** The call failed and returned ERROR: CONNECTION DOES NOT EXIST.
- INSUFFICIENT RESOURCES:** The call failed and returned ERROR: INSUFFICIENT RESOURCES.
- FOREIGN SOCKET UNSPECIFIED:** The call failed and returned ERROR: FOREIGN SOCKET UNSPECIFIED.
- CONNECTION CLOSING:** The call failed and returned ERROR: CONNECTION CLOSING.

**Table 10 – TCP send call arguments**

TCP send call argument	Value
local connection name	Local Connection Name returned by TCP open call
buffer address	Buffer argument of SEND service request
byte count	Buffer Size argument of SEND service request
PUSH flag	Should be set to one when one or more end of frame (EOF) characters (see clause 5) are in the buffer.
URGENT flag	Zero.
timeout	Shall be the same as the timeout specified in the TCP open call that established the connection.

### 6.2.4 The RECEIVE service request

An ADToE port uses the RECEIVE service request to receive data from a remote ADToE port. The RECEIVE service request performs a TCP receive call as specified in RFC 793. The arguments to the TCP receive call shall be as specified in Table 11. The data received shall be processed as specified in clause 7.

If the RECEIVE service request is invoked a second time before enough data had been received to fill the buffer specified by the previous invocation, then the buffer specified in the first invocation shall be filled before any data is placed in the buffer indicated by the second invocation.

**Service Response = RECEIVE (IN (Local Connection Name, Buffer, Buffer Size))**

Input arguments:

**Local Connection Name:** The identifier for the connection.

**Buffer:** A buffer containing data to be transmitted. The data in the buffer shall be encoded (see 6.2).

**Buffer Size:** The number of bytes of encoded to be transmitted on the connection.

**Service Response** assumes one of the following values:

**OK:** The call completed successfully and returned OK.

**CONNECTION ILLEGAL:** The call failed and returned ERROR: CONNECTION ILLEGAL FOR THIS PROCESS.

**CONNECTION DOES NOT EXIST:** The call failed and returned ERROR: CONNECTION DOES NOT EXIST.

**INSUFFICIENT RESOURCES:** The call failed and returned ERROR: INSUFFICIENT RESOURCES.

**CONNECTION CLOSING:** The call failed and returned ERROR: CONNECTION CLOSING.

**Table 11 – TCP receive call arguments**

TCP receive call argument	Value
local connection name	Local Connection Name returned by TCP open call
buffer address	Buffer argument of RECEIVE service request
byte count	Buffer Size argument of RECEIVE service request

### 6.2.5 The CLOSE service request

An ADToE port uses the CLOSE service request to close a connection. The CLOSE service request performs a TCP close call as specified in RFC 793. The arguments to the TCP close call shall be as specified in Table 12.

**Service Response = CLOSE (IN (Local Connection Name))**

Input arguments:

**Local Connection Name:** The identifier for the connection.

**Service Response** assumes one of the following values:

**OK:** The close completed successfully and returned OK.

**CONNECTION ILLEGAL:** The call failed and returned ERROR: CONNECTION ILLEGAL FOR THIS PROCESS.

**CONNECTION CLOSING:** The call failed and returned ERROR: CONNECTION CLOSING.

**Table 12 – TCP close call arguments**

TCP send call argument	Value
local connection name	Local Connection Name returned by TCP open call



### 6.2.6 The STATUS service request

An ADToE port uses the STATUS service request to obtain the status of a connection to another ADToE port. The STATUS service request performs a TCP status call as specified in RFC 793. The arguments to the TCP status call shall be as in Table 13.

**Service Response = STATUS (IN (Local Connection Name), OUT([State]))**

Input arguments:

**Local Connection Name:** The identifier for the connection.

Output arguments:

**State:** The connection state returned by the TCP status call. This argument is returned if and only if the Service Response is OK.

**Service Response** assumes one of the following values:

**OK:** The call completed successfully and returned OK.

**CONNECTION DOES NOT EXIST:** The call failed and returned ERROR: CONNECTION DOES NOT EXIST.

**Table 13 – TCP status call arguments**

TCP status call argument	Value
local connection name	Local Connection Name returned by TCP open call

---

Editor's Note 5: Do we need this service request?

---

### 6.2.7 The ABORT service request

An ADToE port uses the ABORT service request to abort all pending SEND and RECEIVE service requests on a connection. The ABORT service request performs a TCP abort call as specified in RFC 793. The arguments to the abort call are as specified in Table 14.

**Service Response = ABORT (IN (Local Connection Name))**

Input arguments:

**Local Connection Name:** The identifier for the connection.

**Service Response** assumes one of the following values:

**OK:** The call completed successfully and returned OK.

**CONNECTION DOES NOT EXIST:** The call failed and returned ERROR: CONNECTION DOES NOT EXIST.

**Table 14 – TCP abort call arguments**

TCP abort call argument	Value
local connection name	Local Connection Name returned by TCP open call

---

Editor's Note 6: Do we need this service request? It could be invoked when link layer error recovery fails and the port reverts to default parameters.

---

### 6.2.8 The OPENED service confirmation:

The ADToE port invokes the OPENED service confirmation to indicate that the requested connection has been opened.

**OPENED (IN (Local Connection Name))**

Input arguments:

**Local Connection Name:** The identifier for the connection.

### 6.2.9 The SENT service confirmation:

The ADToE port invokes the SENT service confirmation to indicate that a number of bytes have been sent. There is not a one-to-one correspondence between invocations of SEND and invocations of SENT. I.e., bytes sent may all be from the buffer specified by a single invocation of the SEND service request or they may span the buffers specified by the invocations of multiple SEND service requests.

**SENT (IN (Local Connection Name, Sent Byte Count))**

Input arguments:

**Local Connection Name:** The identifier for the connection.

**Sent Byte Count:** The number of bytes sent.

### 6.2.10 The RECEIVED service indication:

The ADToE port invokes the RECEIVED service indication to indicate that a number of bytes have been received. There is not a one-to-one correspondence between invocations of RECEIVE and invocations of RECEIVED. I.e., multiple invocations of RECEIVED may be required to indicate that the buffer specified in one invocation of RECEIVE has been filled, and a single invocation of RECEIVED may indicate that bytes have been received which span the buffers specified in multiple invocations of RECEIVE.

**RECEIVED (IN (Local Connection Name, Received Byte Count))**

Input arguments:

**Local Connection Name:** The identifier for the connection.

**Received Byte Count:** The number of bytes received

### 6.2.11 The CLOSED service indication:

The ADToE port invokes the CLOSED service indication when the connection has been closed. The ADToE port shall not invoke either the SENT service confirmation or the RECEIVED service indication when the connection is closed. (See clause 6.3.2.)

**CLOSED (IN (Local Connection Name))**

Input arguments:

**Local Connection Name:** The identifier for the connection.

### 6.2.12 The ABORTED service indication:

The ADToE port invokes the ABORTED service indication to indicate that all pending data transmissions have been aborted. A pending data transmission is that part of the contents of one or more data buffers which have been passed to the ADToE port, but for which a SENT service confirmation has not been received.

The connection remains open after ABORTED is invoked.

### **ABORTED (IN (Local Connection Name))**

Input arguments:

**Local Connection Name:** The identifier for the connection.

## **6.3 ADToE port operations**

### **6.3.1 Establishing a connection**

An ADToE port shall open a connection before sending any ADT information units (IUs). To open a connection between two ports, both ports invoke the OPEN service request; at least one of the invocations shall specify an Active argument with a value of TRUE. Therefore the invocations of OPEN by two ADToE ports A and B can occur in three combinations which will establish a connection:

- a) A specifies Active = TRUE and B specifies Active = FALSE;
- b) A specifies Active = FALSE and B specifies Active = TRUE; or
- c) A and B specify Active = TRUE.

If both A and B invoke OPEN with Active = FALSE, then a connection shall not be established.

When a connection has been established, the OPENED service indication shall be invoked in each port. The Local Connection Name identifies the connection. For purposes of transferring SCSI commands, data, responses, and task management requests that use the ADToE port, the Local Connection Name identifies the I\_T nexus. An ADToE port shall not invoke the SEND, RECEIVE, CLOSE, or ABORT service requests until an OPENED service indication has been invoked.

### **6.3.2 Removing a connection**

An ADToE port invokes the CLOSE service request to remove a connection. The Port State Machine of an ADToE port shall be in either P0:Initial state or P3:Logged Out state before the CLOSE service request is invoked. An ADToE port is not required to invoke the CLOSE service request after the Port State Machine transitions from P2:Logged In to P3:Logged Out or from P3:Logged Out to P0:Initial.

Invocation of the CLOSED service indication indicates that the connection has been closed. If the CLOSED service indication is invoked and the Port State Machine is in the P1:Login state or the P2:Logged In state, then an I\_T nexus loss event shall occur. If the CLOSED service indication is invoked, the Port State Machine shall enter P0:Initial state.

An ADToE port shall not invoke the SEND, RECEIVE, CLOSE, or ABORT service requests after a CLOSED service indication has been invoked.

---

**Editor's Note 7:** Should a transition be added to the Port State Machine figure?

---

### **6.3.3 Sending data**

An ADToE port sends an ADT information unit by invoking the SEND service request one or more times. One invocation of SEND may send more or less than one information unit.

When one or more invocations of SEND indicate that all of the data in the buffer specified by an invocation of SEND has been sent, then SEND must be invoked again to send more data.

### **6.3.4 Receiving data**

Before an ADToE port can receive data, it must invoke the RECEIVE service request to specify the buffer to receive the data. RECEIVE may be invoked multiple times before any of the specified buffers has been filled.

When an ADToE port receives data from a connection, it invokes the RECEIVED service indication. One invocation of RECEIVED may indicate the arrival of less than a complete information unit or of more than one information unit. The received data shall be processed as described in 7.

When one or more invocations of RECEIVED indicate that the buffer specified by an invocation of RECEIVE has been filled, then RECEIVE shall be invoked again to provide a buffer to receive more data.

---

Editor's Note 8: Should counters of bytes to send and bytes received be defined and the effects of the above operations on the counters defined?

---

#### 6.4 TCP connections over Ethernet

An Ethernet port (see IEEE 802.3) used for transmission of ADT frames shall support both 10 Mbit per second and 100 Mbit per second transmission rates and may support higher rates.

##### **Renumbering**

Clauses presently numbered 6 and higher are renumbered to 7 and higher. Notes, figures, and tables will also need to be renumbered.

##### **Changes to previously-numbered clause 6**

The description of the BAUD RATE field is changed as follows:

~~The~~ In ports that use the ADT physical layer, the BAUD RATE field indicates the speed that the port's physical interface shall run after completion of negotiation. The BAUD RATE field contains the desired nominal Baud rate divided by 100. All ports shall default to operating at 9 600 Baud at power-up and following error conditions that require re-establishment of the operating parameters (see 4.6.2).

In ports that use the TCP layer, the BAUD RATE field shall be set to FFFFh.

If a port receives a Port Login IU containing a baud rate value less than 9 600 it shall respond with a NAK IU with a status code of NEGOTIATION ERROR (see table 14).

##### **Change to previously-numbered clause 6.5.4**

The BAUD RATE field indicates the speed that the port's physical interface shall run after completion of negotiation. The BAUD RATE field contains the desired nominal Baud rate divided by 100. All ports shall default to operating at 9 600 Baud at power-up and following error conditions that require re-establishment of the operating parameters (see 4.6.2). If a port receives a Port Login IU containing a baud rate value less than 9 600 it shall respond with a NAK IU with a status code of NEGOTIATION ERROR (see table 14).

In Login IUs transmitted over ADToE ports, the BAUD RATE field shall be set to FFFFh.